

FOR
DC 8/63 CF
ONLY

CAPITOL
INTERNATIONAL AIRWAYS

Form No. G-403
(Oct. 1, 1978)

EMERGENCY EXITS



SEAT BELTS



FASTEN



Keep seat belt fastened
when seated




UNFASTEN



BRACE POSITION

A. DOOR EXITS AND ESCAPE SLIDES

1. Pull handle up and over. Push door out.

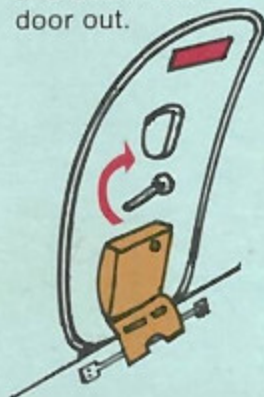

2. Pull Red Handle to inflate slide.



3. Remove shoes and all sharp objects.




NO SHOES

4. Jump and sit in slide.



B. ESCAPE WINDOWS OVER WINGS

1. Pull window handle in and down.

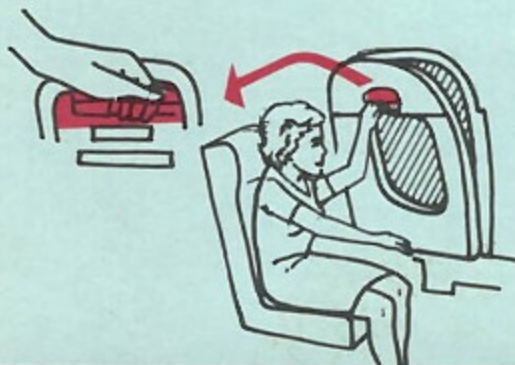

2. Remove shoes and all sharp objects.




NO SHOES

3. Discard window through opening, and exit through window.




4. At rear of wing, slide down flaps.

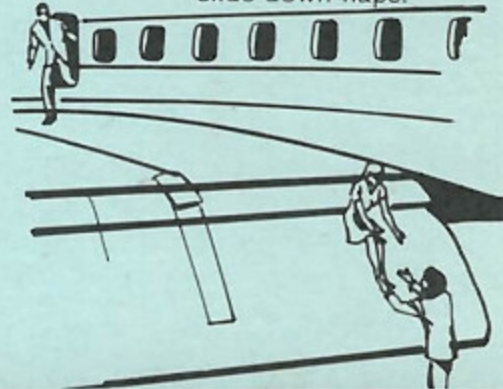


C. AUXILIARY DOOR EXITS AND ESCAPE SLIDES

1. Pull handle in and down.

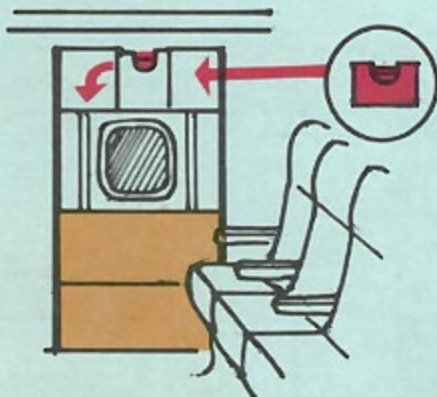

2. Let go of handle when exit starts to fall out.

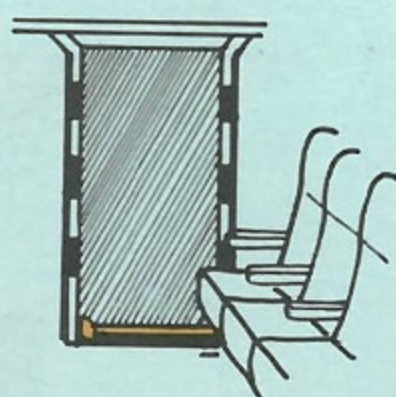


3. Remove shoes and all sharp objects.



NO SHOES

4. Jump and sit in slide.

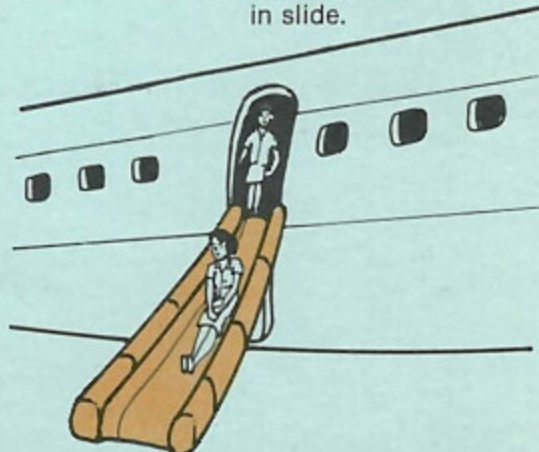

PLEASE DO NOT REMOVE THIS CARD FROM AIRCRAFT

NO RADIOS



NO ELECTRIC COMPUTERS





NO VISIBLE FLUID LIGHTERS



PLEASE DO NOT REMOVE THIS CARD FROM AIRCRAFT

OXYGEN

1. No smoking while oxygen is in use.
2. Oxygen masks are located in a compartment above each row of passenger seats.
3. When oxygen masks appear, properly place the mask over nose and mouth and breathe normally.
4. How to adjust mask. Once mask is in place, it may be adjusted by pulling on the elastic head band.

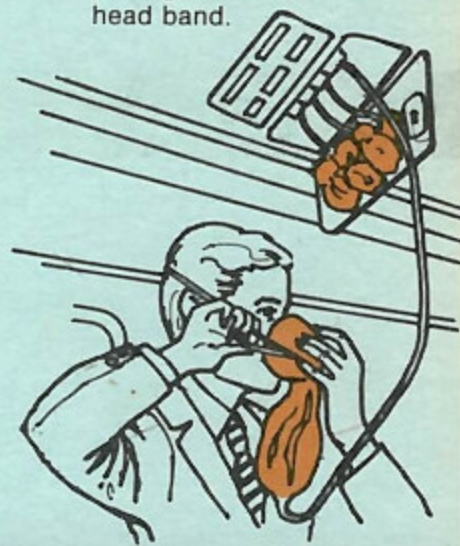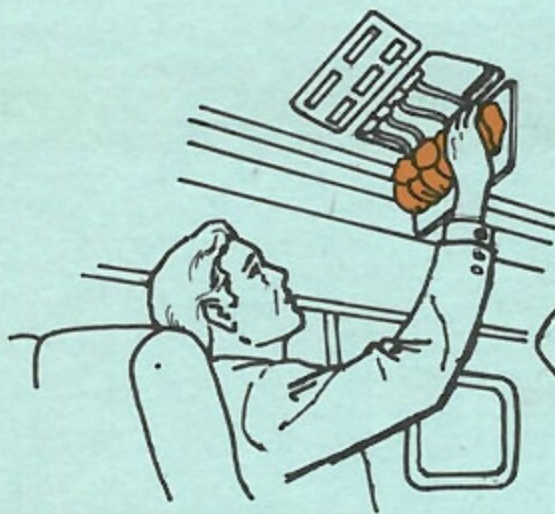

LIFE VEST

1. Individual life vest is under each seat.

PULL TAB FOR VEST



2. Put on life vest over your head. Pull waist straps from back and fasten hooks into rings.



3. Pull straps until they are very snug around waist.



4. To inflate life vest pull downward on the two red knobs at the bottom of vest.



LIFE RAFT CEILING COMPARTMENT

1. To open ceiling raft compartment, pull this handle down.



2. Lift raft off compartment door and launch out nearest exit.



NO SHOES




HOW TO INFLATE RAFT

When raft is launched into water it is secured to the airplane by a tape.

To avoid inflating the raft inside the airplane do not lift or drag raft by this Tape.

To inflate raft, lift this flap and pull ring and cable all the way out.

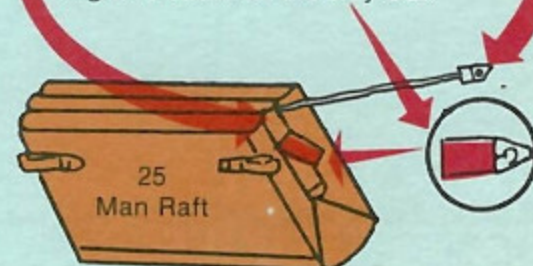

RADIO BEACON TRANSMITTER



COIL SPRING

ANTENNA


RADIO BEACON TRANSMITTER LOCATED IN COCKPIT BULKHEAD

LANYARD

HOLES FOR WATER ENTRANCE TO ACTIVATE BATTERY

CAPITOL
INTERNATIONAL AIRWAYS

HAT RACK RAFT

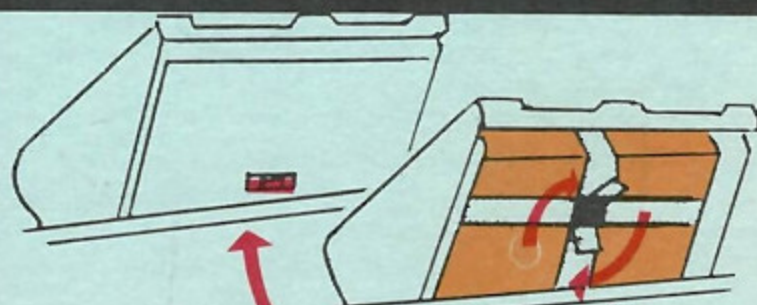

To remove cover pull up on latch. Rotate buckle (Like door knob) to release straps. Remove raft and Launch out nearest window exit.